


C.TRENDLUX2-TOP-LED / MULTITREND2-TOP-LED




- Equisite solid design surface or semi-recessed mounted powerful double-sided LED fixture with perfect light distribution for non-maintained/maintained (NM/M) or centralised (C) emergency lighting available in all following versions:
 - **AUTOTEST** (-AT) or **DALI**
 - **CENTRALTEST** (-ATXL) for ELMAX LOOK system (look up pages No.166)
 - **Wireless CENTRALTEST** (-ATZB) for ELMAX-ATZB system (page No.168)
 - **CENTRAL BATTERY** (C.TRENDLUX) for **non-addressable CBS** (page No.174)
 - **CENTRAL BATTERY** (-ATXP) for system **ELMAX-PATROLUX & Addressable CBS** (look up also page No.170)
- Conforming to the requirement of EN60598-2-22, EN1838, EN62034
- Design: PC impact resistant body
- kompaktné a elegantné výkonné núdzové svietidlo s perfektnou distribúciou svetla pre netralné (NM) alebo pre trvalé/netralné (NM/M) alebo (C) centrálné napájané núdzové osvetlenie dostupné vo verziách pre:
 - **AUTOTEST** (-AT) alebo **DALI**
 - **CENTRALTEST** (-ATXL) pre systém ELMAX LOOK (pozri str.166)
 - **bezdrôtový CENTRALTEST** (-ATZB) pre ELMAX-ATZB systém (str.168)
 - **CENTRAL BATTERY** (C.TRENDLUX) pre **neadresovateľné CBS** (str.174)
 - **CENTRAL BATTERY** (-ATXP) pre systém **ELMAX-PATROLUX s adresovateľnou CBS** (pozri str. 170)
- spĺňa požiadavky európskej normy EN 60598-2-22, EN1838, EN62034
- konštrukcia: teleso z nerozbitného PC



Input Power:

- 5,8W/ 6,1VA (maintained M)
- 2,0W/ 3,9VA (non-maintained NM)
- 6,3W/ 6,5VA (CBS)

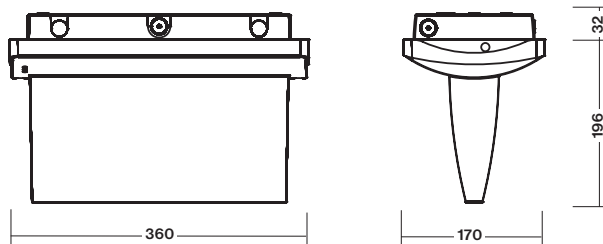

STANDARD FEATURES

STANDARDNÁ VÝBAVA

- **High efficient MidPower (150lm/W) LONGLIFE LEDs 5000K (>100.000h)**
- **NEW Advanced Electronics**
- **LONGLIFE NiMh or LiFePo4 battery**
- **Installation Mode** (battery protection, for more details look up page No.181+205)
- **Intelligent battery charging** (intermittent charging, look up page No.181+205)
- **DIP Switch** allowing to preset following functions:
 - **ECO Mode** (dimming 10%-100%, for more details look up page No.181+205)
 - **ENERGY Saving Mode** (picto illumination 2cd/m² or 200cd/m², look up page 181)
- Special mirror effect reflector
- Addressable CENTRALTEST communication module (for ATXL, ATXP only)
- LEDs indicating presence of power supply and signaling failures + TEST button
- **vysoko účinné MidPower LED 5000K (150lm/W) so životnosťou min.100000h**
- **progressívna elektronická jednotka**
- **LONGLIFE NiMh alebo LiFePo4 batéria**
- **Inštaláčny mód** (ochrana batérie, pozri aj str.181+205)
- **Inteligentné nabíjanie batérie** ("intermittent" nabíjanie, pozri aj str.181+205)
- **DIP prepínač** umožňujúci prednastavenie funkcií:
 - **ECO Mód** (stmievanie 10%-100%, pozri aj str.181+205)
 - **ENERGY Saving Mód** (osvetlenie pikto na 2cd/m² alebo 200cd/m², pozri str.181)
- špeciálny odrazový reflektor so zrkadlovým efektom
- adresovateľný CENTRALTEST komunikačný modul (len pre ATXL, ATXP verzie)
- signalizácia LED a TEST tlačítka


OPTIONAL ACCESSORIES

PRÍPLATKY


- Non-adhesive legends (look up page No.206)
- Wall mounting or pendant brackets (look up page No.206)
- Semi-recessed mounting accessories (look up page No.206)
- fóliové piktogramy (pozri str.206)
- nástenná alebo stropná závesná konzola (pozri str.206)
- ochranný kovový kôš (pozri str.206)
- príslušenstvo pre polozapustenú montáž do stropu (pozri str.206)



Optional Foil Legends
Príplatkový piktogram
(look up also page No.206)

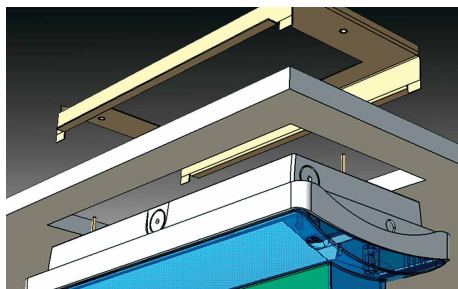

Optional Semi-recessed accessories
Príplatkové príslušen. pre polozapustenú montáž
(look up also page No.206)

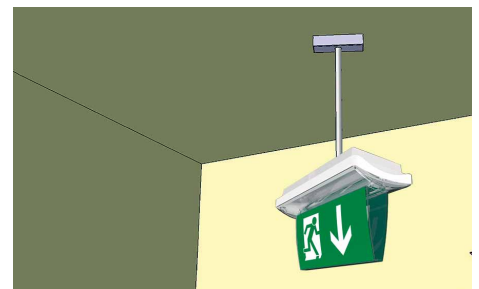

Optional Brackets
Príplatkové konzoly
(look up also page No.206)

C.TRENDLUX2-TOP-LED / MULTITREND2-TOP-LED



SELF-CONTAINED BATTERY VERSIONS		CBS CENTRAL BATTERY VERSIONS	
<p>NORMAL MODE 230V MAINS</p>	<p>EMERGENCY BATTERY MODE</p>	<p>DEFAULT SETT./ PREDNASTAVENÉ Full Power</p>	<p>CBS CENTRAL BATTERY</p>
<p>ECO MODE 50% (in 230V mode) EMERGENCY MODE LEGEND BRIGHTNESS > 200cd/m²</p>	<p>ECO MODE 50%</p>	<p>ECO MODE 25% (in 230V mode) EMERGENCY MODE LEGEND BRIGHTNESS > 200cd/m²</p>	<p>ECO MODE 25%</p>
<p>ECO MODE 10% (in 230V mode) EMERGENCY MODE LEGEND BRIGHTNESS > 200cd/m²</p>	<p>ECO MODE 10%</p>	<p>ENERGY SAVING (in emerg.mode) LEGEND BRIGHTNESS > 2cd/m² JAS PIKTOGRAMU > 2cd/m²</p>	<p>ECO MODE 10% LEGEND BRIGHTNESS > 2cd/m² JAS PIKTOGRAMU > 2cd/m²</p>
<p>ENERGY SAVING (in emerg.mode) ECO MODE 50% (in 230V mode) LEGEND BRIGHTNESS > 2cd/m²</p>	<p>ENERGY SAVING (in emerg.mode) ECO MODE 25% (in 230V mode) LEGEND BRIGHTNESS > 2cd/m²</p>	<p>ENERGY SAVING (in emerg.mode) ECO MODE 10% (in 230V mode) LEGEND BRIGHTNESS > 2cd/m²</p>	<p>TO SEE THE CHANGE EITHER PUSH THE TEST BUTTON OR DISCONNECT THE FIXTURE FROM BOTH THE MAINS 230V AND BATTERY</p> <p>Po prestavení stlačte TEST alebo odpojte batériu a pripojenie na sieť na aktiváciu zmeny</p>
<p>INSTALLATION MODE SET UP</p>	<p>DEFAULT / PREDNASTAVENÉ OFF - ACTIVATED ON - DEACTIVATED</p>	<p>NON-MAINTAINED / MAINTAINED MODE SET UP</p>	<p>DEFAULT / PREDNASTAVENÉ ON - MAINTAINED OFF - NON-MAINTAINED</p>
<p>AUTOTEST / CENTRALTEST MODE SET UP</p>	<p>DEFAULT / PREDNASTAVENÉ OFF - AUTOTEST ON - CENTRALTEST</p>	<p>Most advanced "V" twin LED light source with perfect light distribution. It is equipped with high efficient (150lm/W) LONGLIFE LEDs with the lifetime min 100.000h</p>	

Page No.162

LED AUTOTEST -AT NM/M

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
MULTITREND2-TOP-AT.1h	NM/M	1h	LED	430 lm / 310 lm	NiMh 4,8V/1,1Ah	277-B-400-01-00-00	1,8 kg
MULTITREND2-TOP-AT.1h	NM/M	1h	LED	430 lm / 310 lm	LiFePo4 6,4V/1,0Ah	277-B-400-04-00-00	1,8 kg
MULTITREND2-TOP-AT.3h	NM/M	3h	LED	430 lm / 310 lm	NiMh 4,8V/3,0Ah	277-B-401-02-00-00	1,9 kg

DALI

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
MULTITREND2-TOP-DALI.3h	NM/M	3h	LED	430 lm / 310 lm	NiMh 6,0V/4,0Ah	277-B-409-02-00-00	1,9 kg

Page No.166

LED CENTRALTEST -ATXL ELMAX-LOOK

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
MULTITREND2-TOP-ATXL.1h	NM/M	1h	LED	430 lm / 310 lm	NiMh 4,8V/1,1Ah	277-B-402-01-00-00	1,9 kg
MULTITREND2-TOP-ATXL.1h	NM/M	1h	LED	430 lm / 310 lm	LiFePo4 6,4V/1,0Ah	277-B-402-04-00-00	1,9 kg
MULTITREND2-TOP-ATXL.3h	NM/M	3h	LED	430 lm / 310 lm	NiMh 4,8V/3,0Ah	277-B-403-02-00-00	2,0 kg

Page No.168

Wireless CENTRALTEST ELMAX-WIRELESS

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
MULTITREND2-TOP-ATZB.1h	NM/M	1h	LED	430 lm / 310 lm	NiMh 4,8V/1,1Ah	277-B-407-01-00-00	1,7 kg
MULTITREND2-TOP-ATZB.3h	NM/M	3h	LED	430 lm / 310 lm	NiMh 4,8V/3,0Ah	277-B-408-02-00-00	1,8 kg



Page No.174

CENTRAL BATTERY (CBS)

Type	Version	Light Source	Light Flux	Order Code	Weight
C.TRENDLUX2-TOP/230V AC/DC	CBS NON-ADDRESSABLE	LED	500 lm	277-B-404-00-00-00	1,3 kg
C.TRENDLUX2-TOP/24V AC/DC	CBS NON-ADDRESSABLE	LED	500 lm	277-B-405-00-00-00	1,3 kg

Look up pages No. 328-335 for 1lx Spacing tables
Pozri str. 328-335 pre rozmiestnenie svietidiel na dosiahnutie 1lx

C.TRENDLUX2-TOP-LED / MULTITREND2-TOP-LED

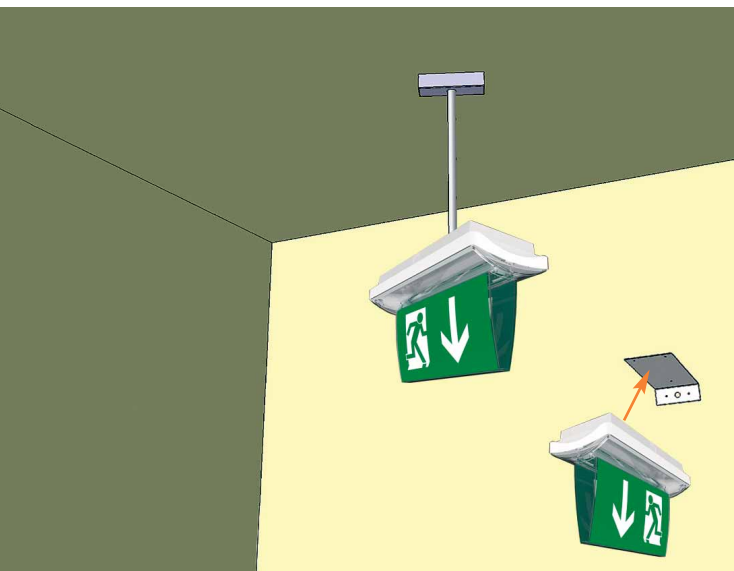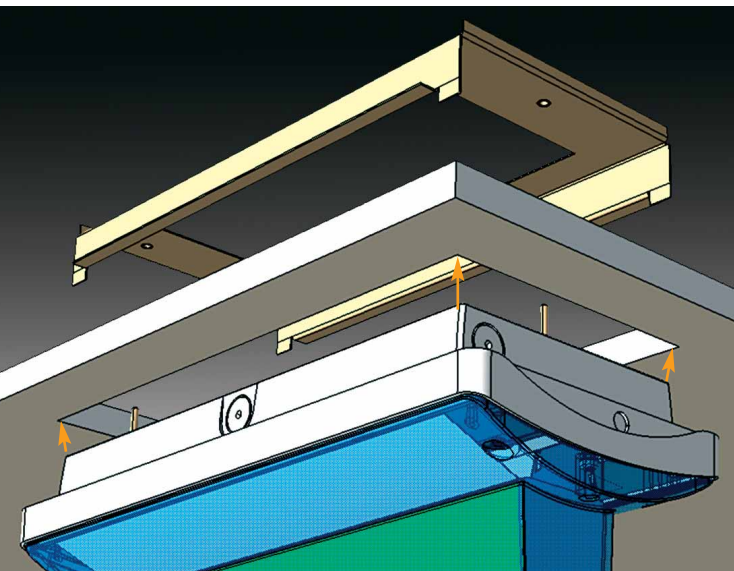


Options:

- Foil pictogram/legend complying ISO7010 (must be ordered separately, order codes below)
- Viewing Distance: 35m
- Legend luminance >500cd/m² (white)

Príplatky:

- foliový piktoqram v súlade s ISO7010 (musí sa objednať samostatne-vid' obj.kódy nižšie)
- rozoznatelnosť piktoqramu: 35m
- jas piktoqramu >500cd/m² (biela)

Optional Item / Príplatok	Order Code / Objednávaci kód
Foil legend "H" / pikto fólia typ "H"	277-B-103-01-00
Foil legend "I" / pikto fólia typ "I"	277-B-104-01-00
Foil legend "J" / pikto fólia typ "J"	277-B-105-01-00
Foil legend "K" / pikto fólia typ "K"	277-B-107-01-00
Foil legend "L" / pikto fólia typ "L"	277-B-108-01-00
Foil legend "M" / pikto fólia typ "M"	277-B-109-01-00
Foil legend "N" / pikto fólia typ "N"	277-B-110-01-00
Foil legend "O" / pikto fólia typ "O"	277-B-111-01-00
Foil legend "Z1" / pikto fólia typ "Z1"	277-B-111-07-00
Foil legend "Z2" / pikto fólia typ "Z2"	277-B-111-08-00

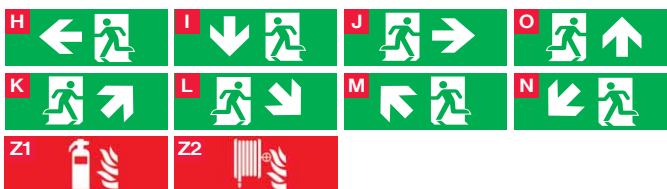


Options:

- Semi-recessed mounting accessories

Príplatky:

- výbava pre polozapustenú montáž do stropu

Optional Item / Príplatok	Order Code / Objednávaci kód
Semi-recessed mouting accessories	277-B-210-01-00
Výbava pre polozapustenú montáž do stropu	277-B-210-01-00



Recessed version mounting hole: 320x152 mm
Rozmer montážneho otvoru: 320x152 mm

Options:

- Wall / Ceiling Pendant mounting brackets

Príplatky:

- nástenná / stropná závesná konzola

Optional Item / Príplatok	Order Code / objednávaci kód
Wall mounting bracket / nástenná konzola	277-B-200-01-00
Pendant bracket 0,5m / závesná konzola 0,5m	277-B-207-01-00
Pendant bracket 1,0m / závesná konzola 1,0m	277-B-208-01-00
Pendant bracket 1,5m / závesná konzola 1,5m	277-B-209-01-00

C.TRENDLUX2-TOP-LED / MULTITREND2-TOP-LED

Light source	LED 5000K >500cd/m ² (white luminance) >200cd/m ² (average luminance)
Installed load	5.8W/6.1VA (maintained M) 2.0W/3.9VA (non-maintained NM) 6.3W/6.5VA (CBS)
Protection type	IP65
Housing material	Impact resistant polycarbonate
Viewing distance	35m

Industrial area emergency lighting application

