




COLDROOM / OUTDOOR
Surface Mounted Emergency Luminaire

C.FROSTLUX / MULTIFROST-LED



← → 30m

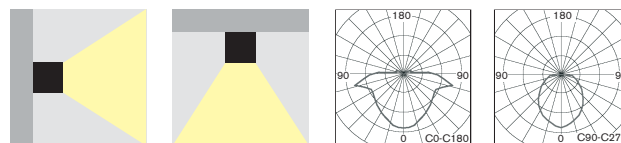

- Solid sturdy design surface mounted powerful fixture with perfect light distribution for non-maintained (NM), non-maintained/maintained (NM/M) or centralised (C) emergency lighting available in all following versions:

- **AUTOTEST** (-AT)
- **CENTRAL BATTERY** (C.FROSTLUX) for **non-addressable CBS** (look up also page No.174)

- Suitable especially for either **OUTDOOR** or **LOW TEMPERATURE applications** equipped with **battery heating unit**

- Conforming to the requirement of EN60598-2-22, EN1838, EN62034

- Design:

- PC impact resistant body

- kompaktné a odolné výkonné núdzové svietidlo s perfektnou distribúciou svetla pre netrvalé (NM) alebo pre trvalé/netrvalé (NM/M) alebo (C) centrálné napájané núdzové osvetlenie dostupné vo verziách pre:

- **AUTOTEST** (-AT),
- **CENTRAL BATTERY** (C.FROSTLUX) pre **neadresovateľné CBS** (pozri str. 174)

- špeciálne navrhnuté pre aplikácie **v exteriéri alebo v PRIESTOROCH S NÍZKOU TEPLOTOU - vybavené riadeným vyhrievaním akumulátora**

- spĺňa požiadavky európskej normy EN 60598-2-22, EN1838, EN62034

- konštrukcia:

- teleso z nerozbitného PC

STANDARD FEATURES

ŠTANDARDNÁ VÝBAVA

- **HighPower LEDs 120lm/W, 5000K**
- Set of self-adhesive legends (A+B+C)
- LEDs indicating both presence of power supply and signaling failures
- TEST button

- **výkonné LED 120lm/W (5000K)**
- sada samolepiacich piktogramov A+B+C
- signalizácia LED a TEST tlačítko





OPTIONAL ACCESSORIES


PRIPLATKY

- Wall or ceiling mounting brackets
- Protective steel cage

- nástenná, stropná alebo stropná závesná konzola
- ochranný kovový kôš

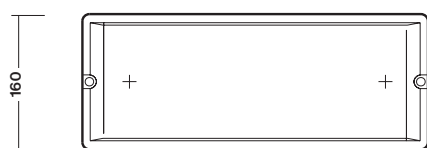

C.FROSTLUX / MULTIFROST-LED



Page No.162


AUTOTEST -AT NM/M for OUTDOOR Application

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
MULTIFROST-AT 6xLED.1h	NM/M	1h	6x HighPower LED	570 lm / 570 lm	NiMh 4,8V/4,0Ah	11-B-43-01-00	2,0 kg

Page No.174

CENTRAL BATTERY (CBS)

Type	Version	Light Source	Light Flux	Order Code	Weight
C.FROSTLUX 5xLED/230V AC/DC	CBS NON-ADDRESSABLE	5x HighPower LED	670 lm	11-B-48-02-00	1,1 kg

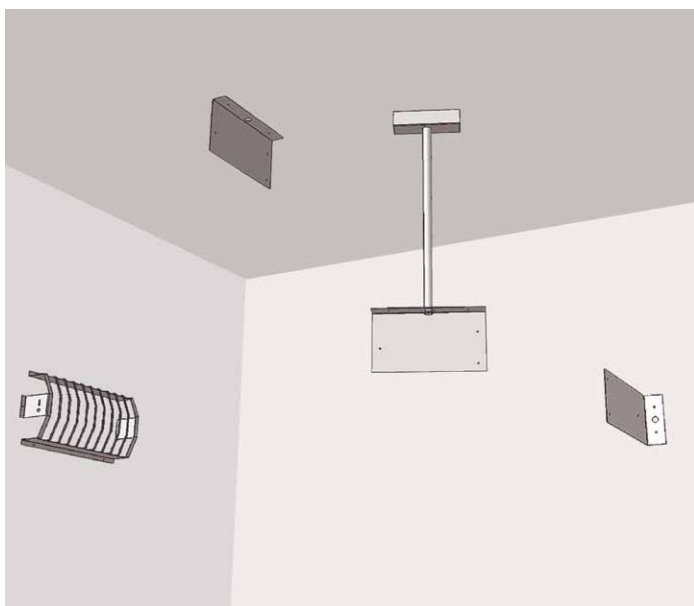

Optional Accessories:

- Wall / Ceiling / Pendant mounting bracket
- Protective Steel Cage

Príplatky:

- nástenná / stropná / závesná konzola
- ochranný kôš

Optional Item / Prílatok	Order Code / objednávací kód
Wall mounting bracket / nástenná konzola	11-B-01-07-01
Ceiling mounting bracket / stropná konzola	11-B-01-06-01
Pendant bracket 1,5m / závesná konzola 1,5m	11-B-00-02-00
Pendant bracket 0,4m / závesná konzola 0,4m	11-B-00-06-00
Protective steel cage / ochranný kôš	11-B-00-03

