


## THINLUX-B-LED



- Smart slim design ceiling mounted lighting fixture for all powerful, energy saving, smooth and comfortable direct/indirect illumination, equipped with HighPower 3000K or 5000K LEDs
- Suitable for all representative areas, especially for offices, hotels, workplaces, exhibitions, banks, shops, schools or even modern residential areas
- Modern high quality materials:
  - body made of pure anodised aluminum profile
  - microprismatic diffuser made of extruded impact resistant PC
- elegantné štíhle stropné závesné svetidlo pre výkonné, úsporné, príjemné a komfortné priame/nepriame osvetlenie, vybavené výkonnými LED vo farbe 3000K alebo 5000K
- vhodné pre použitie pre reprezentačné interiéry, kancelárie, hotely, výstavníky, obchodné priestory, banky, školy, ale aj moderné obytné priestory...
- vysokokvalitné materiály:
  - teleso: eloxovaný AL profil
  - difúzor: prizmatický polykarbonátový profil PC

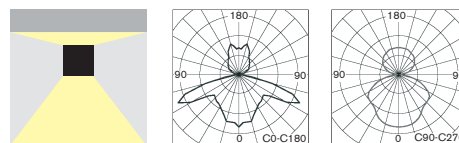

Prismatic diffuser detail  
Detail prizmatického difúzora

### STANDARD FEATURES

### ŠTANDARDNÁ VÝBAVA

- High Power LEDs 100-120lm/W made by OSRAM
- LED electronic ballast
- High-Power LED 100-120lm/W typu OSRAM
- vybavené elektronickým predradníkom pre LED

### OPTIONS

### PRIPLATKY

- Alternative surface treatment is possible (min.order quantity 100pcs)
- Alternative LED light colour is possible (min.order quantity 100pcs)
- povrchová úprava svetidla podľa špecifikácie v RAL (min. 100ks)
- alternativná LED farba svetla podľa špecifikácie (min. 100ks)



## THINLUX-B-LED

Type / Typ	A x B x C mm	Input Power	LED parameters	CRI	Order Code	Weight
THINLUX-B 32xLED/3000K	610 x 260 x 38 mm	70W	32x LED/ 3000K/ 4300lm	typical 82	172-B-28	3,0 kg
THINLUX-B 32xLED/5000K	610 x 260 x 38 mm	70W	32x LED/ 5000K/ 4300lm	typical 82	172-B-29	3,0 kg
THINLUX-B 64xLED/3000K	1164 x 260 x 38 mm	140W	64x LED/ 3000K/ 8600lm	typical 82	172-B-30	6,0 kg
THINLUX-B 64xLED/5000K	1164 x 260 x 38 mm	140W	64x LED/ 5000K/ 8600lm	typical 82	172-B-31	6,0 kg
THINLUX-B-DIM-DALI 64xLED/3000K	1164 x 260 x 38 mm	140W	64x LED/ 3000K/ 8600lm	typical 82	172-B-33	6,0 kg
THINLUX-B-DIM-DALI 64xLED/5000K	1164 x 260 x 38 mm	140W	64x LED/ 5000K/ 8600lm	typical 82	172-B-35	6,0 kg

All LED parameters are describing the light source lm output. For the lighting calculation please use LDT file available on [www.sec.sk](http://www.sec.sk)  
LED parametre sú platné pre LED svetelné zdroje samotné. Pre svetelno-technický výpočet použite LDT súbor na [www.sec.sk](http://www.sec.sk)

Meeting room application



Project by:  
**SLOS**  
Banská Bystrica  
[www.slos.sk](http://www.slos.sk)